			444 Par'4 P	OTIDTO A BUILTING							
FORM P	/TO-139/ 1-98)	0 (Modified) U.S. DEPARTMENT OF COL	MMERCE PATENT AND TRADEN ARE TO 14	ANDEADAS OCCEPANDED UNITED							
	ŢR	RANSMITTAL LETTER TO $^{\circ}$	RCA88853								
		DESIGNATED/ELECTED C	OFFICĖ (DO/EO/US)	U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR							
	ſ	CONCERNING A FILING U	NDER 35 U.S.C. 371	09/582451							
INTE		IONAL APPLICATION NO. INT. PCT/US99/00315	ERNATIONAL FILING DATE 07 JANUARY 1999	PRIORITY DATE CLAIMED 07 JANUARY 1998							
TITLE		NVENTION	U/ JANUAR I 1777	U/ JANUAR 1 1770							
			O LIP SYNC DELAY AND METI	HOD THEREFORE							
APPLI	(CAN	T(S) FOR DO/EO/US									
		EL SCOTT DEISS AND MARK R	OBERT ANDERSON								
	_										
Appli	cant h	nerewith submits to the United States De	esignated/Elected Office (DO/EO/US) th	he following items and other information:							
1.	\boxtimes	This is a FIRST submission of items of	concerning a filing under 35 U.S.C. 371								
2.		This is a SECOND or SUBSEQUEN	T submission of items concerning a filin	ng under 35 U.S.C. 371.							
3.	\boxtimes	This is an express request to begin nat	tional examination procedures (35 U.S.C applicable time limit set in 35 U.S.C. 3	C. 371(f)) at any time rather than delay							
4.	\boxtimes			e 19th month from the earliest claimed priority date.							
	×	A copy of the International Applicatio		, 17th House nom the carness claimed process, care.							
	د ا		, , , , , ,	rnational Bureau).							
<u>-</u> 5. □ <u>-</u> 6.		 a. is transmitted herewith (required only if not transmitted by the International Bureau). b. has been transmitted by the International Bureau. 									
Q.			ation was filed in the United States Rece	eiving Office (RO/US).							
∐ =6.		. ,	lication into English (35 U.S.C. 371(c)(2	<u> </u>							
7.		A copy of the International Search Rep		2)).							
····8.	\boxtimes			e 19 (35 U.S.C. 371 (c)(3))							
		Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3)) a. are transmitted herewith (required only if not transmitted by the International Bureau).									
. L		b. \(\square\) have been transmitted by the International Bureau.									
		c. \square have not been made; however, the time limit for making such amendments has NOT expired.									
pak panj		d. 🗵 have not been made and will	,	•							
		A translation of the amendments to the	e claims under PCT Article 19 (35 U.S.C	C. 371(c)(3)).							
10 .		An oath or declaration of the inventor(
11.	\boxtimes	A copy of the International Preliminar	ry Examination Report (PCT/IPEA/409)).							
12.		A translation of the annexes to the Inte	ernational Preliminary Examination Rep								
_		(35 U.S.C. 371 (c)(5)).									
		3 to 20 below concern document(s) of									
13.		An Information Disclosure Statement		27 27 CVD 2 22 - 12 21 1 1 - 1-1-1							
14.			g. A separate cover sheet in compliance	e with 37 CFR 3.28 and 3.31 is included.							
15.		A FIRST preliminary amendment.									
16.		A SECOND or SUBSEQUENT prelin	minary amendment.								
17.		A substitute specification.	17								
18.		A change of power of attorney and/or address letter.									
19.	⊠ ⊠	Certificate of Mailing by Express Mail									
20.	\boxtimes	Other items or information: RETURN RECEIPT POSTCARD									
		RETURN RECEIFT FOSTCARD									
				ı							

Y

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants

Michael Scott Deiss et al.

Int'l. Appl. No.:

PCT/US99/00315

Int'l. Filing No:

07 January 1999 (07.01.99)

For

APPARATUS FOR PROVIDING A VIDEO LIP SYNC

DELAY AND METHOD THEREFORE

PRELIMINARY AMENDMENT

Honorable Assistant Commissioner for Patents Washington, D.C. 20231

Dear Sir:

In the US national phase application of PCT/US99/00315 filed herewith, please enter the following amendments:

In the Claims

In Claim 1, line 2, delete [(1500, 1501)],

line 5, delete [(1500)],

line 6, delete [(1507, 1509)],

line 8, delete [(1540, 1550, 1560)],

line 10, delete [(1511)],

line 14, delete [(1613)],

line 18, delete [(1605, 1607)],

line 21, delete [(1519, 1523, 1525, 1529)],

In Claim 2, line 1, delete [(1605],

line 2, delete [1607)].

In Claim 3, line 1, delete [(1605,]

line 2, delete [1607)] and [(1613)].

In Claim 4, line 1, delete [(1605,]

line 2, delete [1607)] and [(1507, 1509)].

In Claim 5, line 1, delete [or Claim 4], ine 2, delete [(1613)] and [(1609)].

In Claim 6, line 2, delete [(1609)].

In Claim 7, line 1, delete [or Claim 7], line 2, delete [(1511)].

In Claim 10, line 2, delete [(1609)].

REMARKS

The above claims have been amended to remove reference indicia. No new matter has been added.

No fee is believed to been incurred by virtue of this amendment. However, if a fee is incurred on the basis of this amendment, please charge such fee against deposit account 07-0832.

Respectfully Submitted, Michael Scott Deiss et al.

By:

David T. Shoneman Attorney for Applicant Registration No. 39,371

(609) 734-9875

THOMSON multimedia Licensing Inc. PO Box 5312, 2 Independence Way Princeton, NJ 08543-5312 26 June 2000

10

30

35

2/PRTS EXPMH F253362225755 WO 99/35824

09/582451 532 Rec'd PCT/PTC 26 JUN 2000

PCT/US99/00315

1

APPARATUS FOR PROVIDING A VIDEO LIP SYNC DELAY AND METHOD THEREFORE

Field of the Invention

The invention concerns an apparatus for providing a delay of a standard definition television ("SDTV") (e.g., NTSC, PAL or SECAM) audio signal to maintain proper synchronization of the video image and the audio output. The invention is especially well suited for use in a high definition television ("HDTV") system.

Background of the Invention

15 Typical consumer electronic products, such as televisions and VCRs are known to be configured to receive standard definition signals (such as NTSC, PAL or SECAM). However, it is recognized that the emerging digital consumer electronic products must be configured to receive both digital streams and standard definition signals. Digital receivers are designed to receive television information in the form of 20 a stream of digital packets representing video and audio information in compressed form in accordance with a predetermined digital compression standard. For example, the MPEG video and audio compression standards may be employed. The MPEG video and audio compression standards are international standards for the coded 25 representation of and audio information developed by the Motion Pictures Expert Group.

Summary of the Invention

The present invention resides in part in the recognition that a high definition digital receiver (e.g., HDTV) configured to receive SDTV signals is subject to displaying a video image that is not in synchronization with the audible output and in part with the apparatus to maintain synchronization.

In accordance with one aspect of the present invention, a receiver apparatus comprises means for receiving a packetized input data

stream; means for receiving a digitized audio signal and a digitized video signal; and means for partitioning said packetized data stream to generate a video component and an audio component. Further, the apparatus comprises a first and second means for digital signal processing to generate, respectively, a decompressed video output signal in response to one of said video component of said packetized data stream and said digitized video signal and a decompressed audio output signal in response to one of said audio component of said packetized data stream and said digitized audio signal. Still further, the apparatus comprises a means for transposing said video output signal to a displayable video signal and said audio output signal to an audible output signal.

In accordance with another aspect of the present invention, the receiver apparatus further comprises an adjustable means for delaying said output audio signal to be in synchronism with said displayable video signal.

In accordance with yet another aspect of the present invention, the adjustable delaying means comprises an adjustable memory device and may be connected to one of the second processing means or the partitioning means. The second processing means further comprises means for secondary audio processing., such as surround sound processing.

25

30

35

20

10

15

In accordance with a method aspect of the present invention, there is provided a method for processing an input signal comprising; receiving one of a packetized input data stream and a digitized signal comprised of a digitized video signal and a digitized audio signal; partitioning one of said packetized data stream to generate a video component and an audio component; converting said digitized video signal into a progressive scan format; processing one of said packetized data stream and said digitized input signal to generate a decompressed video and audio output signal; and transposing said video output signal to a displayable video signal and said audio output signal to an audible output signal.

In accordance with another method aspect of the present invention, the method for processing an input signal further comprises delaying said audio output signal to be in synchronism with said displayable video signal. The step of delaying comprises providing said audio output signal to an adjustable memory device or to a secondary processor.

These and other aspects of the invention will be described with respect to the accompanying Drawings.

10

15

5

Brief Description of the Drawing

Figure 1 is a simplified schematic block diagram of a digital receiver including apparatus constructed in accordance with an exemplary embodiment of the present invention; and

Figure 2 is a simplified schematic block diagram of the audio MPEG/AC-3 decoder of Figure 1.

20

25

30

35

Detailed Description of the Drawing

Digital receiver 15 tunes, demodulates and otherwise processes the received television signal as will be described in detail below to produce displayable video images on a conventional display device and audible signals on conventional speakers in response to received television information.

The apparatus shown in Figure 1 is a digital receiver 15, such as, for example, one that may be employed in a high definition television ("HDTV"). Particularly, the television information is received in either (1) compressed form in accordance with a predetermined digital compression standard (for example, the MPEG video and audio compression standards) or (2) SDTV analog signal (for example, NTSC, PAL or SECAM). The MPEG video and audio compression standards are international standards for the coded representation of and audio information developed by the Motion Pictures Expert Group.

The digital video and audio signals are compressed and encoded according to the MPEG video and audio compression and encoding standards to form respective series or streams of data packets. The video and audio packets are multiplexed to form a stream of packets for transmission. Each packet of the transmission stream includes a data or "payload" portion and a header portion which identifies the type of information represented by the payload portion of the packet. Packets corresponding to control and other data may also be added the transmission stream.

10

15

25

30

35

5

Forward error correction (FEC) data is added to the packets in order make the correction of errors due to noise within the transmission path possible. The well known Viterbi and Reed-Solomon types of forward error correction coding may both be advantageously employed. The digital information resulting from the compression, encoding and error correction operations is modulated on a carrier in what is known in the digital transmission field as QPSK (Quadrature Phase Shift Keying) modulation.

Digital receiver 15 includes both a HD/NTSC tuner 1500 and a DSS tuner 1501, both having a local oscillator and mixer (not shown) for selecting the appropriate carrier signal form the plurality of received signals and for converting the frequency of the selected carrier to a lower frequency to produce an intermediate frequency (IF) signal.

Further HD/NTSC tuner 1500 and DSS tuner 1501 demodulate the IF signal.

DSS tuner 1501 may include a QPSK demodulator, not shown, to produce a demodulated digital signal and a FEC decoder, not shown, to decode the error correction data contained in the demodulated digital signal, and based on the error correction data corrects the demodulated packets representing video, audio and other information to produce a stream of error corrected data packets which are provided to link circuitry 1505. The SDTV demodulated signal from HD/NTSC tuner 1500 is further processed in a conventional manner by NTSC processing circuitry 1540. (The details of NTSC processing circuitry 1540 are not required to fully understand the present

10

15

20

invention.) Whereas, the HD demodulated stream is provided the link circuitry 1505.

A MPEG transport decoder unit 1507 cooperates with a buffer memory in the form of a random access memory (RAM) 1509 to route the payload portion of the video packets of the error corrected stream to a video MPEG decoder 1511 and the payload portion of the audio packets to an audio MPEG/AC-3 decoder 1513 via a data bus or separate lines according to the header information contained in the packets. RAM 1509 is used to temporarily store packets of the data stream of the transmitted signal in respective memory locations in accordance with the type of information which they represent. Transport unit 1507 is a memory manager for buffer RAM 1509 which demultiplexes the data packets of the error corrected stream and routes the payload portions of the packets to respective memory locations according to the header portions of the respective packets. The contents of the video and audio sections of RAM 1509 are read out and transferred to video MPEG decoder 1511 and audio MPEG/AC-3 decoder 1513, respectively, on demand in response to requests from these units. Details of the construction of transport 1507 and buffer RAM 1509 are not required to understand the present invention, but may be found in US patent application serial number 232,789, entitled "A Packet Video Signal Inverse Transport System" filed for M. S. Deiss on April 22, 1994.

25

30

35

Video MPEG decoder 1511 interfaces with a dynamic random access memory (DRAM) 1515 to decode and decompress the payload portion of the video packets to form a stream or sequence of digital words representing video information in component form. For example, the components may correspond to a luminance (Y) component and two color difference (Cr and Cb) components. Further, video MPEG decoder 1511 has a separate input to receive a digitized SDTV video signal from analog-to-digital converter ("A/D") 1550. (Details of the construction of video MPEG decoder is not required to understand the present invention.) Video decoding and decompression integrated circuits (ICs) are commercially available. For example, a MPEG decoding and decompression IC, identified by part number ST3240, is available from SGS Thomson, of France.

20

25

The luminance and chrominance representative digital words are converted to analog luminance and chrominance signals by respective sections of a digital-to-analog converter (DAC) 1519.

These analog luminance and chrominance signals are coupled to "2H" video processing circuitry 1529 which converts the component representative digital words to three separate video signals; R, G and B. These video signals are provided to a display device 1531. (Details of the construction of the well known "2H" video processing circuitry and display device are not required to understand the present invention.)

Audio MPEG/AC-3 decoder 1513 interfaces with dynamic random access memory (DRAM) 1521 to decode and decompress the payload portion of the audio packets to produce a sequences of digital words representing "left" (L) and "right" (R) audio information. As is well known in the art, memory 1521 may optionally be integral with audio MPEG/AC-3 decoder 1513. Further, decoder 1513 has a separate input to receive a digitized standard definition audio signal (explained in detail below in connection with Figure 2a). decoding and decompression ICs are commercially available. For example, a MPEG audio decoding and decompression IC, identified by part number DSP56011, is available from Motorola. The sequences of audio representative digital words are converted to baseband analog left and right audio signals by respective sections of DAC 1523 and audio processing circuitry 1525. Although only two audio channels are shown in the Figure, it will be appreciated that in practice, one or more additional audio channels, for example, for "surround sound" reproduction, may be provided.

30

35

The baseband analog video and audio signals are coupled to speakers 1527, which may be integral with display device 1531 via respective baseband connections. The baseband analog video and audio signals may also be coupled to a modulator (not shown) which modulates the analog signals on to a radio frequency (RF) carrier in accordance with a conventional television standard such as NTSC, PAL or SECAM for coupling to the antenna input of a display device without baseband inputs.

10

15

20

A microprocessor 1527 provides frequency selection control data to HD/NTSC tuner 1500 and DSS tuner 1501 for controlling the operation of the tuner to tune channels selected by the user. Microprocessor 1527 also operates interactively with transport 1507 to affect the routing of payload portions of packets. Microprocessor 1527 additionally provides control data to video MPEG decoder 1511 and audio decoder 1513 via a control bus. Microprocessor 1527 operates in response to a control program stored in a "read only" memory (ROM) 1529.

Both video MPEG decoder 1515 and audio MPEG/AC-3 decoder 1513 are configured to receive the digitized video and audio components, respectively, of a SDTV analog input signal. Digitized video and audio components are provided by passing the demodulated and processed analog video and audio components generated by NTSC processing circuitry through analog-to-digital converters 1550 and 1560, respectively. In operation, the digitized video component is processed by the video MPEG decoder and up-converter 1511 and the digitized audio component is processed by audio MPEG/AC-3 decoder 1513. The time to process the digitized video component is greater than the time necessary to process the digitized audio component thereby creating a delay between audio output and the display image.

25 The apparatus shown in Figure 2 is a simplified schematic block diagram of the audio MPEG/AC-3 decoder 1513 discussed above. described above, decoder 1513 generates digital words which represent the audio information in response to either a digitized SDTV audio signal produced by A/D 1560 or the audio portion of the input stream produced by MPEG transport decoder unit 1507 and RAM 30 1509. The details of audio MPEG/AC-3 decoder 1513 will be discussed in terms of it functional operation and signal flow path. The audio portion of the input MPEG stream is supplied to decoder 1513 through parallel input/output 1603. The input stream is provided to FIFO memory means 1601 for initial processing and 35 formatting. Audio MPEG/AC-3 Processing circuitry 1613 processes the input stream to produce sequences of digital words representing the audio information. Additional audio processing, such as surround

10

15

20

sound processing, may be performed by subsequent audio processing means 1609 to produce further processed audio information. A control signal (not shown) is provided multiplexer ("MUX") 1611 to select between the audio information generated by processing and control circuitry 1613 and the further processed audio information generated by subsequent audio processing means 1609.

Audio MPEG/AC-3 decoder 1513 is configured to generate audio information in response to a digitized SDTV audio input signal received from A/D 1560 as described above. FIFO memory means 1601 formats the digitized audio input signal prior to it being provided to pulse code modulated circuitry 1605. As discussed above, the time to process the digitized SDTV audio input signal is less than the time necessary to process the corresponding digitized video signal thereby necessitating the insertion of a delay in the audio processing to maintain synchronization between these two signals. The PCM processed audio input signal is provided to delay means 1607. Delay means 1607 may be a portion of the general memory 1521 associated with the audio MPEG/AC-3 decoder 1513. The delayed audio input signal is provided to the control portion of audio MPEG/AC-3 processing circuitry 1613 and may either be supplied directly to MUX 1611 or to subsequent audio processing means 1609 as described above prior to being supplied to D/A 1523.

- Alternately, the PCM processed audio signal may be provided to transport unit 1507 and RAM 1509 through parallel I/O 1603 for delay processing. Specifically, RAM 1509 will be used to achieve the delay accomplished by delay means 1607 as described above.
- While the present invention has been described in terms of a specific embodiment, it will be appreciated that modifications may be made. These and other modifications are contemplated to be within the scope of the invention defined by the following claims.

20

CLAIMS

- 5 1. A receiver comprising:
 - (a) means for receiving a packetized input data stream comprised of multiplexed and compressed packets, each of said packets having at least header and payload data;
- (b) means for receiving a digitized audio signal and a digitized 10 video signal;
 - (c) means for partitioning said packetized data stream to generate a video component and an audio component;
 - (d) first means for digital signal processing to generate a decompressed video output signal in response to one of said video component of said packetized data stream and said digitized video signal;
 - (e) second means for digital signal processing to generate a decompressed audio output signal in response to one of said audio component of said packetized data stream and said digitized audio signal; and
 - (f) means for transposing said video output signal to a displayable video signal and said audio output signal to an audible output signal.
- 25 2. The receiver of claim 1 further comprising an adjustable means for delaying said output audio signal to be in synchronism with said displayable video signal.
- 3. The receiver of claim 2 wherein said adjustable delaying means comprises an adjustable memory device.
 - 4. The receiver of claim 3 wherein said delaying means is connected to said second processing means.
- 35 5. The receiver of claim 3 wherein said delaying means is connected to said partitioning means.

15

20


30


- 6. The receiver of claim 4 or claim 5 wherein said second processing means further comprises means for secondary audio processing.
- 5 7. The receiver of claim 6 wherein said secondary audio processing means comprises means for surround sound processing.
 - 8. The receiver of claim 1 or claim 7 wherein said first processing means comprises a means for converting said digitized video signal having an interlace video format into a digitized video signal having a progressive scan format.
 - 9. A method for processing an input signal having a video component and an audio component, said method comprising:
 - (a) receiving one of a packetized input data stream and a digitized signal comprised of a digitized video signal and a digitized audio signal;
 - (b) partitioning one of said packetized data stream to generate a video component and an audio component;
 - (c) converting said digitized video signal into a progressive scan format;
 - (d) processing one of said video component of said packetized data stream and said digitized video signal to generate a decompressed video output signal;
- 25 (e) processing one of said audio component of said packetized data stream and said digitized audio signal to generate a decompressed audio output signal,
 - (f) transposing said video output signal to a displayable video signal and said audio output signal to an audible output signal.
 - 10. The method of claim 9 further comprising delaying said audio output signal to be in synchronism with said displayable video signal.
- 11. The method of claim 10 wherein the step of delaying comprises providing said audio output signal to an adjustable memory device.
 - 12. The method of claim 11 further comprising the step of providing said audio output signal to a secondary processor.

Abstract of the Disclosure

A digital receiver for processing one of a packetized input data stream and a digitized standard definition input signal is provides a delay in the processing of the standard definition audio input signal to maintain synchronism with the processing of a corresponding standard definition video signal.

10

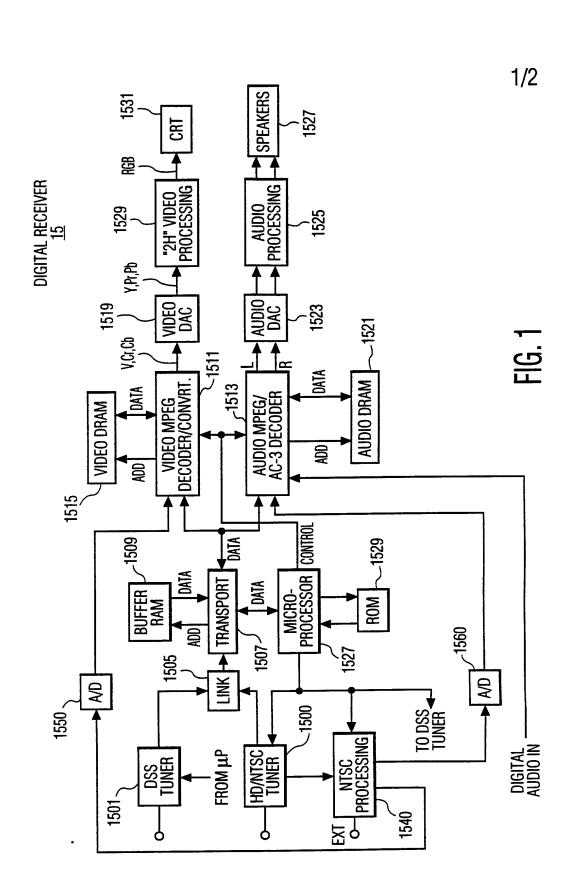

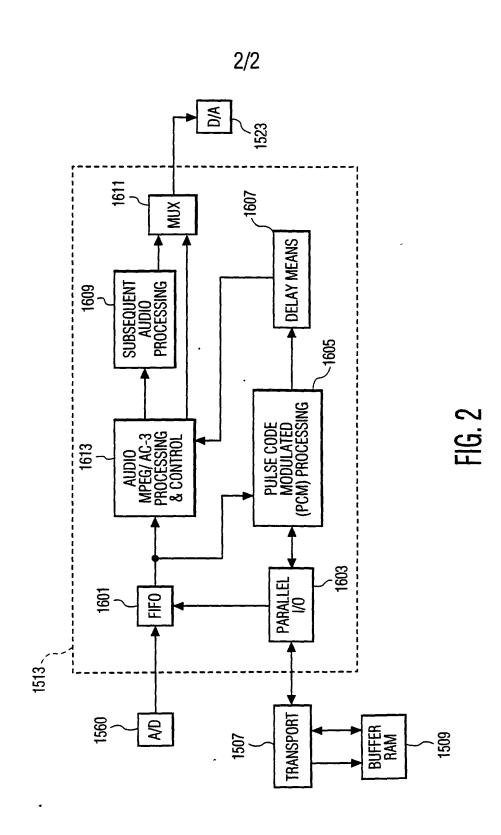

ļæ Æ ļ.



PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number. valid OMB control number.

DECLADATION FOR HELLING	Attorney Docket Number	RCA 88853				
DECLARATION FOR UTILITY OR DESIGN	First Named Inventor	Michael Scott Deiss				
PATENT APPLICATION	COMPLETE IF KNOWN					
(37 CFR 1.63)	Application Number					
Declaration St.	Filing Date					
Declaration Declaration Submitted OR Submitted after Initial	Group Art Unit	· · · · · · · · · · · · · · · · · · ·				
with Initial Filing (surcharge Filing (37 CFR 1.16 (e)) required)	Examiner Name					

AS a below named inventor I here	by declare		As a below named inventor, I hereby declare									
•												
My residence, post office address, and citizenship are as stated below next to my name.												
I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural												
names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:												
APPARATUS FOR PROVIDING A VIDEO LIP SYNC DELAY AND METHOD THEREFORE												
the specification of which (Title of the Invention)												
is attached hereto												
OR was filed on (MM/DD/////)												
was filed on (MM/DD/YYYY)	January 7,	1999	as United States	Application	Number or PCT Int	ernational						
Application Number PCT/US9	9/00315 an	d was amended on (MM/D	D/YYYY)	May 5,	2000	(if applicable).						
I hereby state that I have reviewed an	d understand the cont	ents of the above identified	specification, in	cluding the	claims, as	_ ,						
amended by any amendment specific	ally referred to above.				, -							
i acknowledge the duty to disclose info	ormation which is mate	erial to patentability as defi	ned in 37 CFR 1.	56.								
	-											
I hereby claim foreign priority benefits to any PCT international application which below, by checking the box, any foreign	inder 35 U.S.C. 119	a)-(d) or 365(b) of any for	eign application(s) for pater	t or inventor's certifi	icate, or 365(a) of						
below, by checking the box, any foreigr that of the application on which priority is		it or inventor's certificate, o	or of any PCT int	f America, ernational	listed below and ha application having a	ive also identified filing date before						
ulat of the application on which phonty is	s claimed.				-	•						
Prior Foreign Application		Foreign Filing Dat	.	ority	Certified Copy	A#						
Number(s)	Country	(MM/DD/YYYY		laimed	YES	NO						
		ŀ										
			I	السا		H						
		ŀ										
Additional foreign application number	ers are listed on a sun	nlemental priority data she	et BTO/SB/ppp									
Additional foreign application number	ers are listed on a sup S.C. 119(e) of any Un	plemental priority data she	et PTO/SB/02B a	ittached he	reto:							
Additional foreign application number I hereby claim the benefit under 35 U.s Application Number(s)	S.C. 119(e) of any Un	ted States provisional appl	et PTO/SB/02B a	attached he	reto:							
I hereby claim the benefit under 35 U.S	S.C. 119(e) of any Un	plemental priority data she ted States provisional appl te (MM/DD/YYYY)	et PTO/SB/02B a	elow.								
I hereby claim the benefit under 35 U.S	S.C. 119(e) of any Un	ited States provisional applite (MM/DD/YYYY)	et PTO/SB/02B a	elow.	nal provisional ap	plication						
I hereby claim the benefit under 35 U.s Application Number(s)	S.C. 119(e) of any Un Filing Da	ited States provisional applite (MM/DD/YYYY)	et PTO/SB/02B a	Addition	nal provisional ap							
I hereby claim the benefit under 35 U.s Application Number(s)	S.C. 119(e) of any Un Filing Da	ited States provisional applite (MM/DD/YYYY)	et PTO/SB/02B a ication(s) listed t	Addition number suppler	nal provisional ap	a sheet						

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO:

valid OMB control number.

DECLARATION—Utility or Design Patent Application

						<u> </u>	<u> </u>	CIIL	<u> P</u>	licatio	<u> </u>		
I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.													
U.S. Parent Application or PCT Parent						Parent Filing Date			Parent Patent Number				
	Numbe	<u> </u>				(MM/D	D/YYYY)		(if applicable)				
PCT/US99/00315							January 7, 1999						
Additional U	l.S. or PC	T international app	lication nun	mbers are listed on	a suppleme	ental priority d	ata sheet PTC	/SB/02B attac	hed he	reto			
As a named inven	Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto. As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent												
and Trademark Of	tice conn	ected therewith:	Ш	Customer Number OR		Place Customer							
				OR Registered practiti	oner(s) nam	e/registration	number listed	below	L	Number Bar Label he			
	Nam	ie		Registra Numb	ation			Name		Registration			
JOSEPH S. 7				26,040)ei			varie.		N	umber		
JOSPEH J. L				27,914									
DAVID T. S	HONE	MAN	1	39,371	_								
Additional reg	istered p	ractitioner(s) name	ed on supple	emental Registered	Practitione	r Information	sheet PTO/SB	/02C attached	hereto				
Direct all corresp	pondenc	e to:	Customer Bar Code	r Number or Label			OI	R 🗶 C	orrespo	ondence addre	ss below		
Name	Joseph	h S. Tripoli - Patent Operations											
Address	THOM	MSON multimedia Licensing Inc.											
Address	PO Bo	x 5312											
City	Prince	ton	•			State	ZIP	08540					
Country	US			Telephone	609-73	34-9875		Fax	600 724 0700				
				own knowledge ar dge that willful false opardize the validity				information	and bel fine or i	ief are believed t mprisonment, or	to be true; and both, under 18		
Name of Sole	or First	Inventor:				A petiti	on has been	filed for this	unsigi	ned inventor			
Give	en Name	(first and midd	e [if any])				Fan	nily Name o	Suma	ame			
MICHAEL S	COTT		1	2 /		DEISS							
Inventor's 2/11/1/2							OCT 11.						
Residence: City Zionsville			State I	N	Country US		20		Citizenship	US			
Post Office Address 1103 Indian Pipe Lane													
Post Office Add	ress	Zionsville, I	ndiana 4	6077 US									
City State ZIP Country													
Additional inv	entors a	re being named	on the	1 suppl	emental A	dditional Inv	rentor(s) she	et(s) PTO/S	B/02A	attached heret			



Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION

ADDITIONAL INVENTOR(S) Supplemental Sheet Page 1 of 1

Name of Additional Joint Inventor, if any:									ventor	
Given Na	Family Name or Surname									
MARK ROBERT	ANDERSON									
Inventor's Signature	Mark Rob	lerson				Date		2000 2000		
Residence: City	Indianapolis State IN Country US						US			US
Post Office Address		US.								
Post Office Address	Indianapolis, Indiana 462	34 US								
City		State			ZIP		Countr	у		
Name of Addition	al Joint Inventor, if any	y:			A petition	on has been file	d for ti	nis unsigi	ned inv	ventor
Given Na	me (first and middle [if any])				Family Nar	ne or	Surname		
Inventor's Signature		···				Da	ate			
Residence: City State					Country			Citize	nship	
Post Office Address										
Post Office Address										
City		State			ZIP		Cou	ntry		
Name of Addition	al Joint Inventor, if any	y:			A petition	on has been file	d for ti	nis unsigi	ned in	ventor
Given Na	Family Name or Surname									
Inventor's Signature	Date									
Residence: City State					Country Citizenship					
Post Office Address										
Post Office Address										
City		ZiP			Country					
				_						

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.



Half of the Mann Street and H. H. Come. #

den the transfer of the transf

United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division



Application deficiencies were found during scanning:

- Page(s) of were not present for scanning. (Document title)
- Page(s) of were not present for scanning. (Document title)

☐ Scanned copy is best available.

There were two sheet of drawings.